



## ● Characteristics

- I Rated DC Current : The current when the inductance becomes 30% lower than its initial value
- II Operating temperature range: -40~85° C


## ● Features

- I Small and Low profile inductor
- II It corresponds to high current.
- III Shield structure magnetically.
- IV Strong structure against a shock-proof

## ● Applications

- I LCD Display etc.
- II For Small DC to DC Converters
- III PDA.

## ● Dimensions

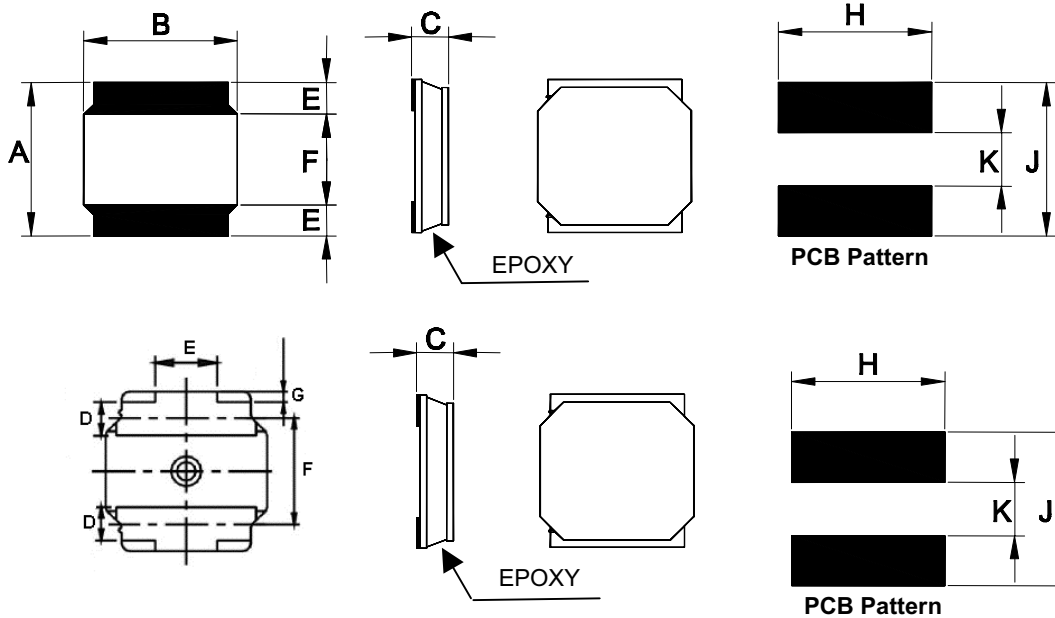

Type	A	B	C(max)	.D	E	F	G	H	J	K
SDIA0310	3.0±0.2	3.0±0.2	1.0	-	0.9±0.2	1.9±0.2	-	2.7	3.0	0.8
SDIA0312	3.0±0.2	3.0±0.2	1.25	-	0.9±0.2	1.9±0.2	-	2.7	3.0	0.8
SDIA0315	3.0±0.2	3.0±0.2	1.5	-	0.9±0.2	1.9±0.2	-	2.7	3.0	0.8
SDIA0410	4.0±0.2	4.0±0.2	1.0	-	1.1±0.2	2.5±0.2	-	3.7	4.0	1.2
SDIA0418	4.0±0.2	4.0±0.2	1.8	-	1.1±0.2	2.5±0.2	-	3.7	4.0	1.2
SDIA0520	5.0±0.2	5.0±0.2	2.0	2.3±0.3	1.25±0.2	3.6±0.2	0.3±0.2	4.7	5.0	1.5
SDIA0528	5.0±0.2	5.0±0.2	2.8	2.3±0.3	1.25±0.2	3.6±0.2	0.3±0.2	4.7	5.0	1.5
SDIA0610	6.0±0.2	6.0±0.2	1.0	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7	6.3	1.6
SDIA0612	6.0±0.2	6.0±0.2	1.2	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7	6.3	1.6
SDIA0620	6.0±0.2	6.0±0.2	2.0	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7	6.3	1.6
SDIA0628	6.0±0.2	6.0±0.2	2.8	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7	6.3	1.6
SDIA0645	6.0±0.2	6.0±0.2	4.5	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7	6.3	1.6
SDIA0840	8.0±0.2	8.0±0.2	4.2	-	1.6±0.3	5.6±0.3	-	7.5	7.4	1.8

## ● Reference Standards

JISC 5201-1

## Ordering Information

Example:

SDIA	0312	M	T	470
(1)	(2)	(3)	(4)	(5)
Series Name	Dimensions (AxC)	Inductance Tolerance	Packaging Code	Inductance

(1)Type: SDIA SERIES

(2)Dimensions(AxC) : 0310=3.0x1.0,0312=3.0x1.25,0315=3.0x1.5,0410= 4.0x1.0,0418= 4.0x1.8,  
0520= 5.0x2.0,0528=5.0x2.8,0610= 6.0x1.0,0612= 6.0x1.2,0620=6.0x2.0,0628= 6.0x2.8,  
0645=6.0x4.5,0840= 8.0x4.0

(3)Inductance Tolerance: M:  $\pm 20\%$ ,N:  $\pm 30\%$

(4)Packaging Code: T: Taping Reel

(5)Inductance : 1R0= 1.0 $\mu$ H,470=47 $\mu$ H,101=100 $\mu$ H

## Inductance and rated current ranges

SDIA0310	1.5~22 $\mu$ H	1.20~0.35A
SDIA0312	1.5~47 $\mu$ H	1.36~0.25A
SDIA0315	2.2~47 $\mu$ H	1.48~0.32A
SDIA0410	1.0~47 $\mu$ H	1.80~0.24A
SDIA0418	1.0~220 $\mu$ H	4.00~0.27A
SDIA0520	2.2~10 $\mu$ H	5.20~2.40A
SDIA0528	2.2~470 $\mu$ H	6.00~0.40A
SDIA0610	4.7~10 $\mu$ H	1.80~1.40A
SDIA0612	2.2~10 $\mu$ H	3.10~1.40A
SDIA0620	1.0~10 $\mu$ H	6.80~1.90A
SDIA0628	0.9~100 $\mu$ H	6.60~0.62A
SDIA0645	1.0~100 $\mu$ H	8.50~0.80A
SDIA0840	0.9~100 $\mu$ H	11.0~1.00A
Test equipment: L: HP4284A LCR meter ,DCR: Milli-ohm meter		
Electrical specifications at 25° C		

## Electrical Characteristics

SDIA0310 / 0312 / 0315 / 0410 Type

Codes	L( $\mu$ H)	Tolerance		Test Condition	DCR( $\Omega$ ) max.				IDC(A) max.			
		0310 0312 0315	0401		0310	0312	0315	0410	0310	0312	0315	0410
1R0	1.0	N	N	100KHz, 0.25V	-	-	0.045	0.100	-	-	1.80	1.80
1R5	1.5	N	N	100KHz, 0.25V	0.080	0.060	-	1.20	1.360	-	-	-
2R2	2.2	N	N	100KHz, 0.25V	0.095	0.080	0.060	0.150	1.10	1.100	1.48	1.15
3R3	3.3	N	M	100KHz, 0.25V	0.140	0.100	0.080	0.180	0.87	0.910	1.21	1.10
4R7	4.7	N	M	100KHz, 0.25V	0.190	0.130	0.120	0.210	0.75	0.770	1.02	0.90
6R8	6.8	N	M	100KHz, 0.25V	0.300	-	-	0.300	0.61	-	-	0.74
100	10	N	M	1KHz, 0.25V	0.450	0.290	0.230	0.380	0.50	0.540	0.70	0.56
150	15	N	M	1KHz, 0.25V	-	-	-	0.510	-	-	-	0.47
220	22	N	M	1KHz, 0.25V	1.030	0.630	0.520	0.870	0.35	0.375	0.47	0.36
330	33	N	M	1KHz, 0.25V	-	1.030	0.840	1.540	-	0.310	0.39	0.28
470	47	N	M	1KHz, 0.25V	-	1.450	1.340	1.810	-	0.250	0.32	0.24

SDIA0418 / 0520 / 0528 / 0610 Type


Codes	L( $\mu$ H)	Tolerance	Test Condition	DCR( $\Omega$ ) max.				IDC(A) max.			
				0310	0312	0315	0410	0310	0312	0315	0410
1R0	1.0	N	100KHz, 0.25V	0.030	-	-	-	4.0	-	-	-
2R2	2.2	N	100KHz, 0.25V	0.060	0.049	0.042	-	2.7	5.2	6.0	-
3R3	3.3	M, N	100KHz, 0.25V	0.070	0.074	-	-	2.0	4.0	-	-
4R7	4.7	M, N	100KHz, 0.25V	0.090	0.098	0.077	0.230	1.7	3.6	4.5	1.8
6R8	6.8	M, N	100KHz, 0.25V	0.110	0.137	-	0.450	1.45	2.9	-	1.6
100	10	M, N	1KHz, 0.25V	0.180	0.205	0.163	0.400	1.20	2.4	3.0	1.4
150	15	M, N	1KHz, 0.25V	0.250	-	-	-	0.94	-	-	-
220	22	M, N	1KHz, 0.25V	0.360	-	0.400	-	0.80	-	1.9	-
330	33	M, N	1KHz, 0.25V	0.530	-	-	-	0.65	-	-	-
470	47	M, N	1KHz, 0.25V	0.650	-	0.854	-	0.57	-	1.5	-
680	68	M, N	1KHz, 0.25V	1.000	-	-	-	0.47	-	-	-
101	100	M, N	1KHz, 0.25V	1.500	-	-	-	0.40	-	-	-
151	150	M, N	1KHz, 0.25V	2.500	-	-	-	0.31	-	-	-
221	220	M, N	1KHz, 0.25V	4.000	-	-	-	0.27	-	-	-
471	470	M, N	1KHz, 0.25V	-	-	7.800	-	-	-	0.4	-

SDIA0418 / 0520 / 0528 / 0610 Type

Codes	L( $\mu$ H)	Tolerance	Test Condition	DCR( $\Omega$ ) max.					IDC(A) max.				
				0612	0620	0628	0645	0840	0612	0620	0628	0645	0840
0R9	0.9	N	100KHz, 0.25V	-	-	0.013	-	-	-	-	6.60	-	-
1R0	1.0	N	100KHz, 0.25V	-	0.026	-	0.014	-	-	-	6.80	-	8.50
1R3	1.3	N	100KHz, 0.25V	-	-	-	0.016	-	-	-	-	8.00	-
1R5	1.5	N	100KHz, 0.25V	-	-	0.016	-	-	-	-	5.00	-	-
1R8	1.8	N	100KHz, 0.25V	-	-	-	0.018	-	-	-	-	7.00	-
2R2	2.2	N	100KHz, 0.25V	0.133	0.049	0.020	-	0.017	3.10	4.70	4.20	-	7.33
2R3	2.3	N	100KHz, 0.25V	-	-	-	0.021	-	-	-	-	6.00	-
3R0	3.0	N	100KHz, 0.25V	-	-	0.023	0.024	-	-	-	3.60	5.00	-
3R3	3.3	M, N	100KHz, 0.25V	-	-	-	-	0.022	-	-	-	-	5.93
4R5	4.5	M	100KHz, 0.25V	-	-	-	0.031	-	-	-	-	4.00	-
4R7	4.7	M, N	100KHz, 0.25V	0.220	0.086	0.031	-	0.023	1.90	2.80	2.70	-	4.70
6R0	6.0	N	100KHz, 0.25V	-	-	0.040	-	-	-	-	2.50	-	-
6R3	6.3	M	100KHz, 0.25V	-	-	-	0.038	-	-	-	-	3.80	-
6R8	6.8	M, N	100KHz, 0.25V	0.280	0.111	-	-	0.033	1.60	2.60	-	-	4.00
100	10	M, N	1KHz, 0.25V	0.430	0.178	0.065	0.047	0.044	1.40	1.90	1.90	3.00	3.40
120	12	M, N	1KHz, 0.25V	-	-	-	-	0.055	-	-	-	-	3.05
150	15	M, N	1KHz, 0.25V	-	-	0.095	0.077	0.065	-	-	1.60	2.30	2.70
220	22	M, N	1KHz, 0.25V	-	-	0.135	0.115	0.086	-	-	1.30	1.90	2.20
330	33	M, N	1KHz, 0.25V	-	-	0.220	0.145	0.130	-	-	1.10	1.50	1.90
470	47	M, N	1KHz, 0.25V	-	-	0.300	0.220	0.200	-	-	0.95	1.30	1.50
680	68	M, N	1KHz, 0.25V	-	-	0.420	0.330	0.300	-	-	0.76	1.00	1.20
101	100	M, N	1KHz, 0.25V	-	-	0.600	0.500	0.380	-	-	0.62	0.80	1.00

## Tape and Reel specifications

THE FORCE FOR TEARING OFF COVER TAPE IS 10 TO 60 GRAMS IN THE ARROW DIRECTION

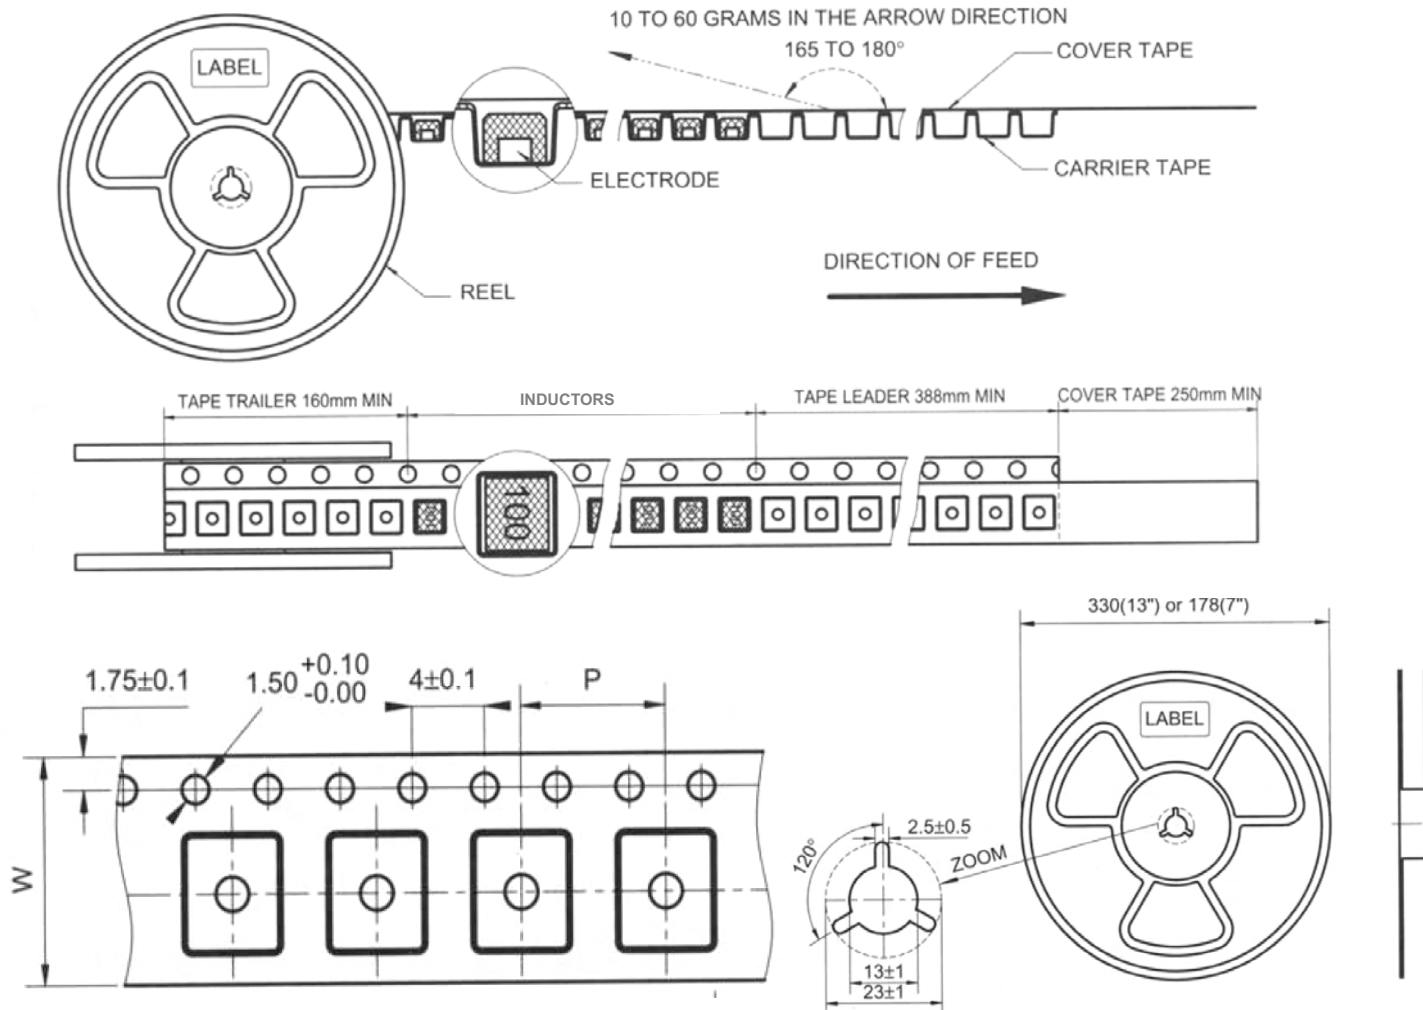

Type	Tape size		Parts Per Reel	
	W	P	7 "	13 "
SDIA0310	12	8	1000	-
SDIA0312	12	8	1000	-
SDIA0315	12	8	1000	-
SDIA0410	12	8	1000	3500
SDIA0418	12	8	-	3000
SDIA0520	12	8	-	2000
SDIA0528	12	8	-	2000
SDIA0610	12	8	1000	-
SDIA0612	12	8	1000	3500
SDIA0620	12	8	-	2000
SDIA0628	12	8	-	2000
SDIA0645	12	8	-	1000
SDIA0840	16	12	-	1000

## SMT Power Inductor Environmental Specifications

### General

Items	Specifications
Shelf Storage conditions:	Temperature range: $25 \pm 3$ ; Humidity: $<80\%$ relative humidity. °C Recommended product should be used within six months from the time of delivery.

### Environmental test

Test Items	Specifications	Test Conditions / Test Methods
High temperature Storage test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Temperature $85 \pm 2^\circ\text{C}$ , Time: $48 \pm 2$ hours, Tested after 1 hour at room temperature.
Low temperature Storage test		Temperature $-25 \pm 2^\circ\text{C}$ , Time: $48 \pm 2$ hours, Tested after 1 hour at room temperature.
Humidity test		Temperature $40 \pm 2^\circ\text{C}$ , $90\sim 95\%$ relative humidity Time: $96 \pm 2$ hours Tested after 1 hour at room temperature.
Thermal shock test		First $-25^\circ\text{C}$ 30minutes then $25^\circ\text{C}$ 10 minutes last $85^\circ\text{C}$ 30 minutes, as 1 cycle. Go through 5 cycles. Tested after 1 hour at room temperature.

### Mechanical test

Test Items	Specifications	Test Conditions / Test Methods
Solderability test	Terminal area must have 90% minimum	Product with Lead-free terminal: Dip pads in flux then dip in solder pot at $245 \pm 5^\circ\text{C}$ for 3seconds.
Resistance to Soldering Heat	No case deformation or change in appearance.	Flux should cover the whole of the sample before heating, then be preheated for about 2 minutes over temperature of $130\sim 150^\circ\text{C}$ . Immersing to $260 \pm 5^\circ\text{C}$ for 10 seconds.
Vibration test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Apply frequency $10\sim 55\text{Hz}$ . 1.5mm amplitude in each of perpendicular direction for 2 hours.
Shock resistance		Drop down with $981\text{m/s}^2$ (100G) shock attitude upon a rubber block method shock testing machine, for 1 time. In each of three orientations..

### The condition of reflow (recommendation):

